
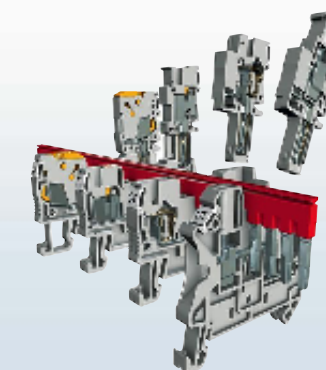


PIT – Push-In Terminal Push-In Connection Terminals

PIT – The new generation of modular terminal blocks in the CLIPLINE complete system. It is now easily possible to wire conductors from 0.34 mm² directly and without tools. The special contact spring makes plugging easier than ever and convinces with high contact quality.

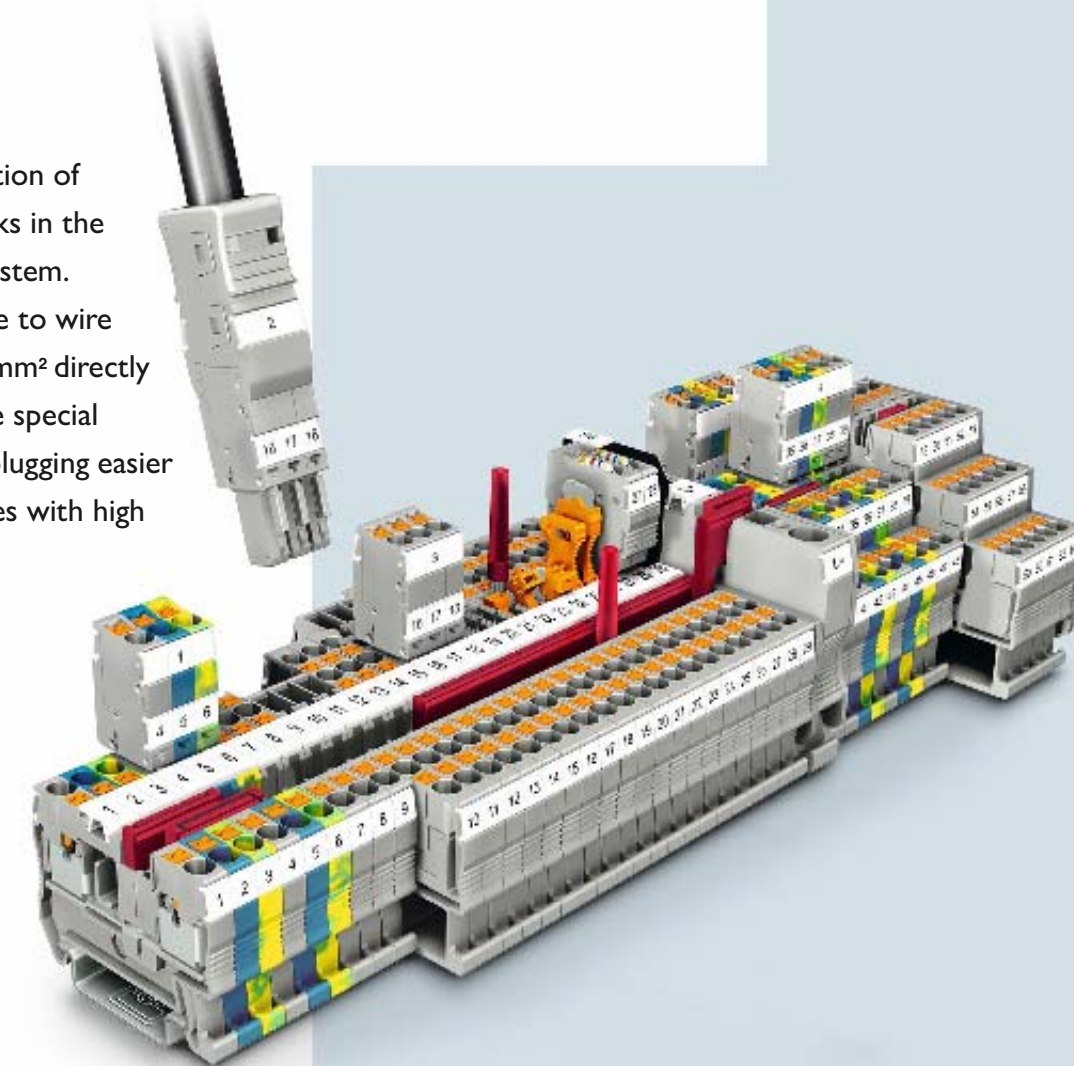

PIT Push-In connection technology
The PIT series is characterized by the easy, direct conductor connection, and it consistently uses the advantages of the CLIPLINE complete system.

Light plugging
The up to 50% lower insertion forces of the PIT push-in connection method allow easy and direct plugging of solid and stranded conductors with ferrules from 0.34 mm².

Lever function
The integrated lever allows loosening of the connected conductors with every tool – simply and without direct contact to live parts.

2-, 3- and 4-conductor terminal blocks			
Type	Order No.	PIT 2,5 PIT 2,5 BU	3209510 3209523
Width / Length / Height	[mm]	5,2 / 48,5 / 36,5	5,2 / 72 / 36,5
Current / voltage	[A] / [V]	30 / 800	30 / 800
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Double-level terminal blocks			
Type	Order No.	PIT 2,5-PE	3209536
Width / Length / Height	[mm]	5,2 / 48,5 / 36,5	5,2 / 60,5 / 36,5
Current / voltage	[A] / [V]	- / -	30 / 800
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Double-level terminal blocks			
Type	Order No.	PITTB 2,5 PITTB 2,5 BU	3210567 3210570
Width / Length / Height	[mm]	5,2 / 68 / 47,5	5,2 / 68 / 47,5
Current / voltage	[A] / [V]	26 / 500	26 / 500
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Double-level terminal blocks			
Type	Order No.	PITTB 2,5-PE/L	3210978
Width / Length / Height	[mm]	5,2 / 68 / 47,5	5,2 / 68 / 47,5
Current / voltage	[A] / [V]	26 / 500	26 / 500
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Double-level terminal blocks angled design			
Type	Order No.	PITTB 2,5 PITTB 2,5 BU	3209604 3209617
Width / Length / Height	[mm]	5,2 / 78 / 55	5,2 / 78 / 55
Current / voltage	[A] / [V]	26 / 500	26 / 500
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Three-level terminal blocks			
Type	Order No.	PIT 2,5-3L PIT 2,5-3L BU	3210499 3210509
Width / Length / Height	[mm]	5,2 / 102 / 58	5,2 / 102 / 58
Current / voltage	[A] / [V]	26 / 500	26 / 500
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Three-level terminal blocks			
Type	Order No.	PIT 2,5-3PV ¹⁾	3210512
Width / Length / Height	[mm]	5,2 / 102 / 58	5,2 / 102 / 58
Current / voltage	[A] / [V]	26 / 500	26 / 500
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Three-level terminal blocks			
Type	Order No.	PIT 2,5-PE/L/N	3210538
Width / Length / Height	[mm]	5,2 / 102 / 58	5,2 / 102 / 58
Current / voltage	[A] / [V]	26 / 500	26 / 500
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

For more technical data, drawings and accessories, visit www.phoenixcontact.net/eshop

- 1) The max. load current must not be exceeded by the total current of all connected conductors.
- 2) With equipotential bond between the levels.
- 3) Observe max load current, depending on the power dissipation of the components. Max 0.5 W with single arrangement.
- 4) For max. power dissipation, see eshop
- 5) Current and voltage are determined by the plug used.


Knife/disconnect terminal blocks			
Type	Order No.	PIT 2,5-MT PIT 2,5-MT BU	3210156 3211650
Width / Length / Height	[mm]	5,2 / 60,5 / 36,5	5,2 / 74 / 55
Current / voltage	[A] / [V]	20 / 400	20 / 400
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Disconnect terminal blocks			
Type	Order No.	PIT 2,5-TG	3210185
Width / Length / Height	[mm]	5,2 / 60,5 / 36,5	5,2 / 74 / 36,5
Current / voltage	[A] / [V]	20 / 400	20 / 400
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4


Disconnect terminal blocks			
Type	Order No.	PIT 2,5-TWIN-TG	3210198
Width / Length / Height	[mm]	5,2 / 60,5 / 36,5	5,2 / 84 / 36,5
Current / voltage	[A] / [V]	20 / 400	20 / 400
Solid / AWG // stranded / AWG	[mm] / -	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14	0,14 - 4 / 26 - 12 // 0,14 - 2,5 / 26 - 14
Stranded with ferrule without/with plastic sleeve	[mm] / -	0,14 - 2,5	0,14 - 2,5
Directly pluggable with ferrule / solid	[mm]	0,34 - 2,5 / 0,34 - 4	0,34 - 2,5 / 0,34 - 4

Contact metal, disconnect, component and fuse plugs			
Type	Order No.	P-FIX	3038956
		P-DI	3036783
		P-CO	3036786
		P-FU	3036606

CLIPLINE

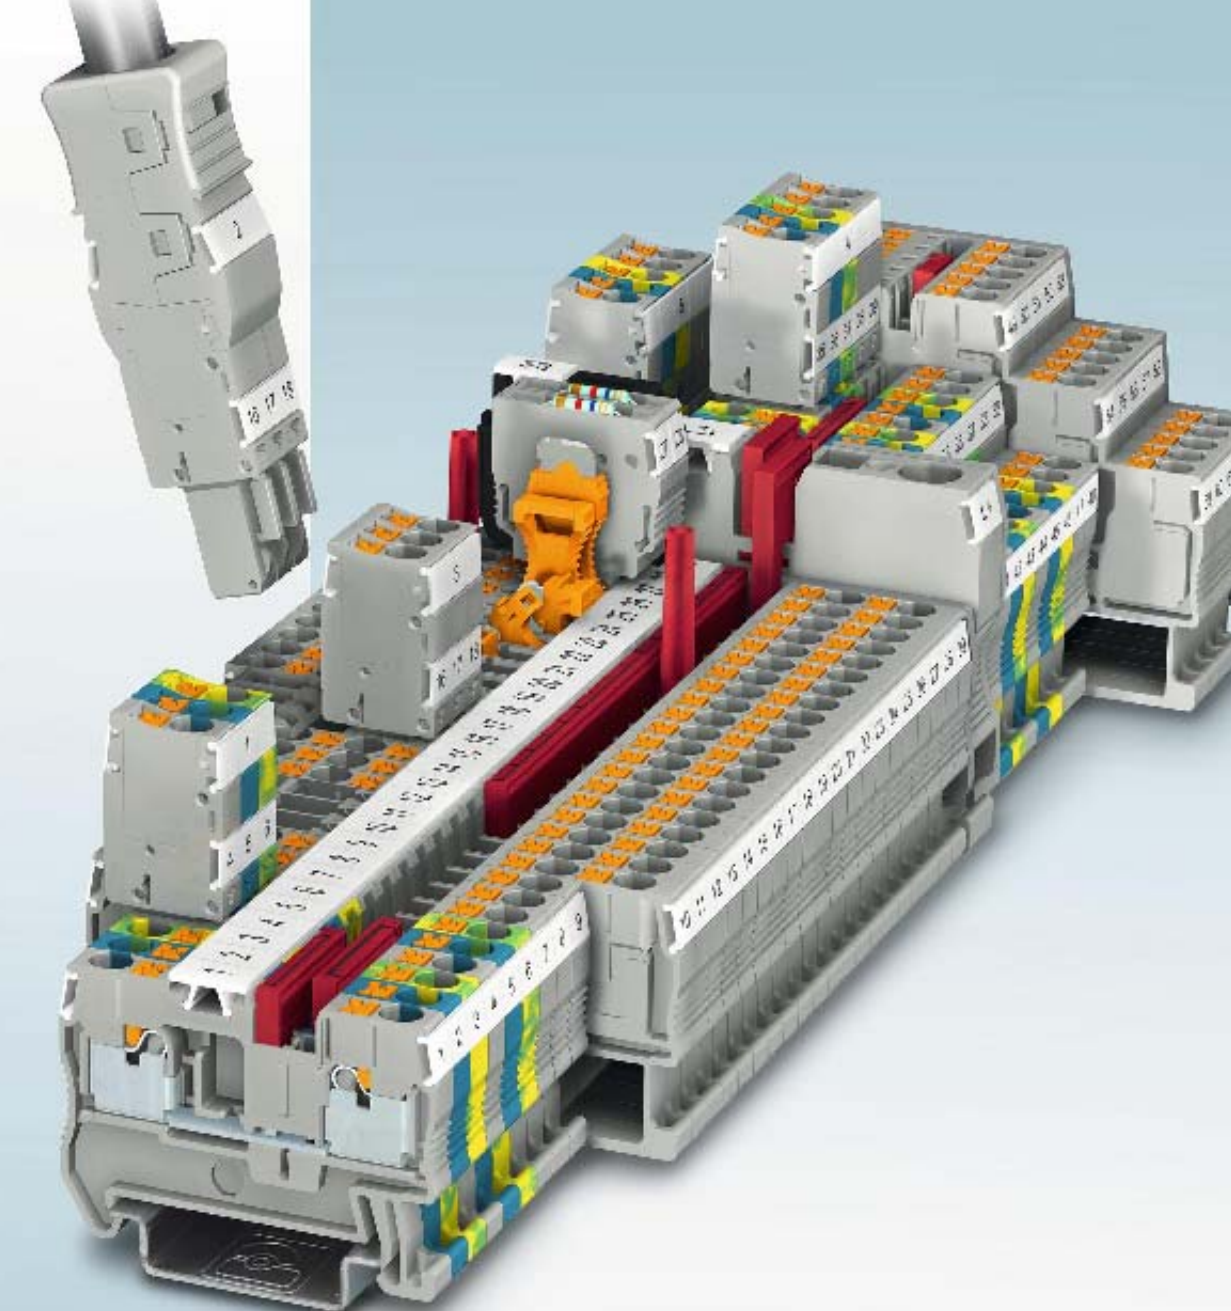


CLIPLINE complete
PIT – Push-In connection technology

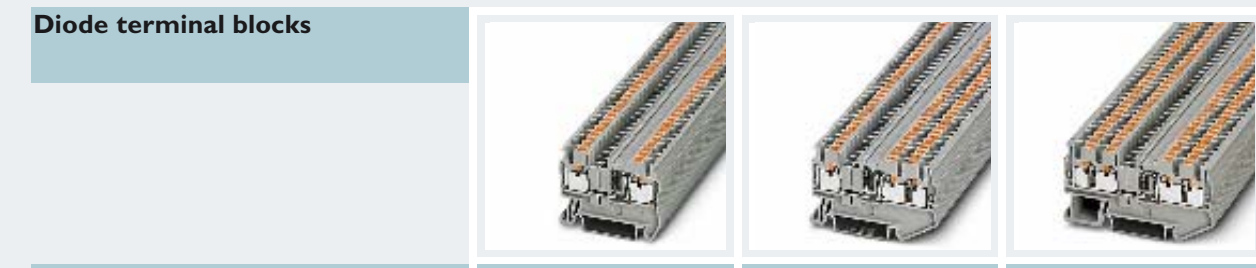

Type	Order No.	PIT 2.5-DIO/L-R PIT 2.5-DIO/R-L	3210224 3210227	PIT 2.5-TWIN-DIO/L-R PIT 2.5-TWIN-DIO/R-L	3210240 3210253	PIT 2.5-QUATTRO-DIO/L-R PIT 2.5-QUATTRO-DIO/R-L	3210266 3210279
Width / Length / Height [mm]		5.2 / 48.5 / 36.5		5.2 / 60.5 / 36.5		5.2 / 72 / 36.5	
Current / voltage [A] / [V]		0.5 / 800		0.5 / 800		0.5 / 800	
Solid / AWG // stranded / AWG [mm] / -		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	
Stranded with ferrule without/with plastic sleeve [mm] / -		0.14 - 2.5		0.14 - 2.5		0.14 - 2.5	
Directly pluggable with ferrule / solid [mm]		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4	




Type	Order No.	PITTB 2.5-DIO-U-O PITTB 2.5-DIO-U-O	3210923 3210936	PITTB 2.5-DIO-UL-R PITTB 2.5-DIO-UL-R	3211427	PITTB 2.5-2DIO-UL-UO-UL PITTB 2.5-2DIO-UL-UO-UL	3211430 3211443
Width / Length / Height [mm]		5.2 / 68 / 47.5		5.2 / 68 / 47.5		5.2 / 68 / 47.5	
Current / voltage [A] / [V]		28 / 500		28 / 500		28 / 500	
Solid / AWG // stranded / AWG [mm] / -		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	
Stranded with ferrule without/with plastic sleeve [mm] / -		0.14 - 2.5		0.14 - 2.5		0.14 - 2.5	
Directly pluggable with ferrule / solid [mm]		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4	

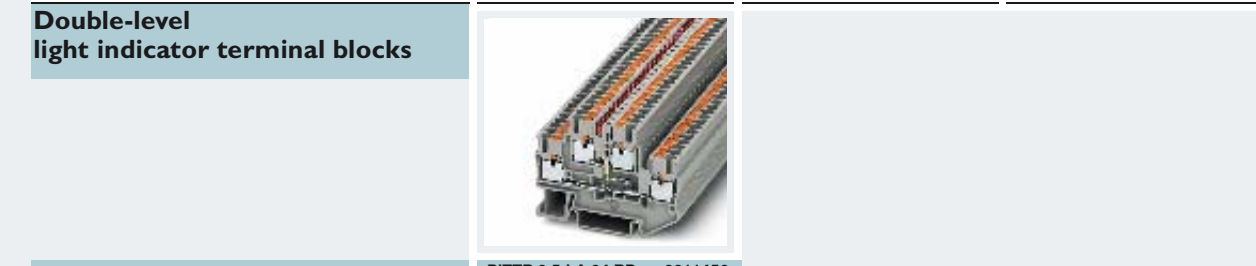


Type	Order No.	PITTB 2.5-LA 24 RD PITTB 2.5-LA 60 RD PITTB 2.5-LA 230	3211456 3211469 3211472
Width / Length / Height [mm]		5.2 / 68 / 47.5	
Current / voltage [A] / [V]		28 / 500	
Solid / AWG // stranded / AWG [mm] / -		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	
Stranded with ferrule without/with plastic sleeve [mm] / -		0.14 - 2.5	
Directly pluggable with ferrule / solid [mm]		0.34 - 2.5 / 0.34 - 4	

For more technical data, drawings and accessories, visit www.phoenixcontact.net/eshop


- The max. load current must not be exceeded by the total current of all connected conductors.
- With equipotential bond between the levels.
- The max. current is determined by the diode. Integrated: Diode 1 N 4007, reverse voltage: 1300 V, maximum continuous current: 0.5 A
- Light indicator ...LA 24 RD for 12-20 V DC, ...LA 60 RD for 30-60 V DC, ...LA 230 for 110-250 V AC/DC
- For derating curve, see www.phoenixcontact.net/eshop

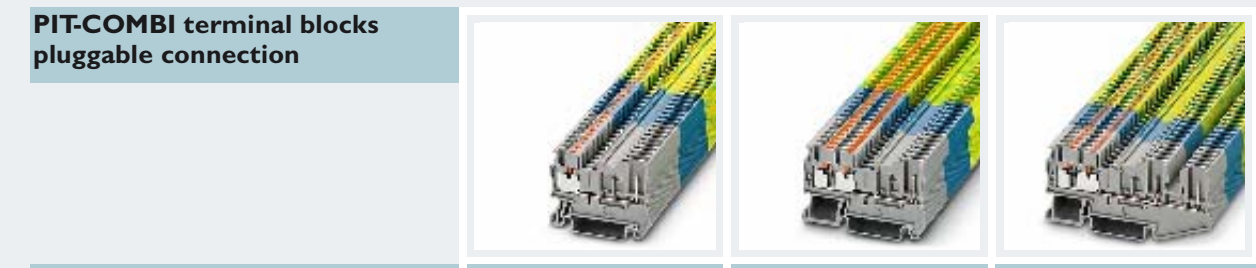

Type	Order No.	PIT 2.5/1P PIT 2.5/1P-BU PIT 2.5/1P-PE	3210033 3210046 3210059	PIT 2.5-TWIN/1P PIT 2.5-TWIN/1P-BU PIT 2.5-TWIN/1P-PE	3209633 3209646 3209659	PIT 2.5-QUATTRO/2P PIT 2.5-QUATTRO/2P-BU PIT 2.5-QUATTRO/2P-PE	3209662 3209675 3209688
Width / Length / Height [mm]		5.2 / 48.5 / 36.5		5.2 / 60.5 / 36.5		5.2 / 61 / 36.5	
Current / voltage [A] / [V]		24 / 500		24 / 500		24 / 500	
Solid / AWG // stranded / AWG [mm] / -		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	
Stranded with ferrule without/with plastic sleeve [mm] / -		0.14 - 2.5		0.14 - 2.5		0.14 - 2.5	
Directly pluggable with ferrule / solid [mm]		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4	

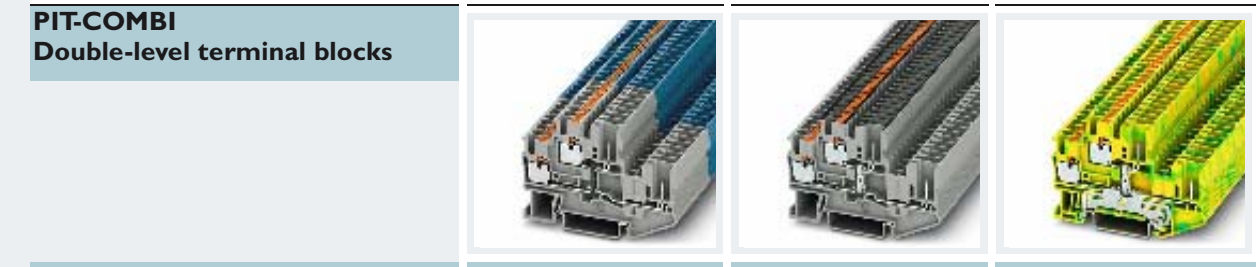

Type	Order No.	PITTB 2.5/2P PITTB 2.5/2P-BU	3210871 3210884	PITTB 2.5/2P-PV PITTB 2.5/2P-PV	3210907	PITTB 2.5/2P-PE PITTB 2.5/2P-PE	3210897
Width / Length / Height [mm]		5.2 / 71.5 / 47.5		5.2 / 71.5 / 47.5		5.2 / 71.5 / 47.5	
Current / voltage [A] / [V]		22 / 500		22 / 500		22 / 500	
Solid / AWG // stranded / AWG [mm] / -		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14		0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	
Stranded with ferrule without/with plastic sleeve [mm] / -		0.14 - 2.5		0.14 - 2.5		0.14 - 2.5	
Directly pluggable with ferrule / solid [mm]		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4		0.34 - 2.5 / 0.34 - 4	

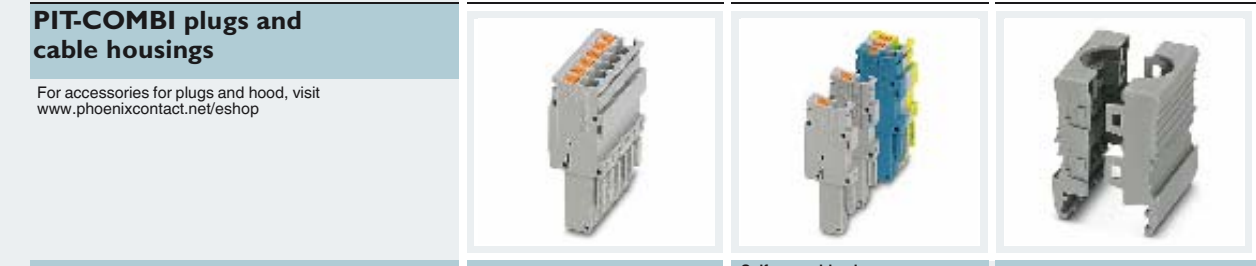


Number of positions	Color	Type	Order No.	Self-assembly plugs Type	Order No.	Type	Order No.
1-pos.	gray	PP-H 2,5/1	3209866	PP-H 2,5/1-L BU	3210062	PH 2,5/2	3209991
2-pos.	gray	PP-H 2,5/2	3209879	PP-H 2,5/1-L GNYE	3210075	PH 2,5/3	3209701
3-pos.	gray	PP-H 2,5/3	3209882	PP-H 2,5/1-M	3210088	PH 2,5/4	3209714
4-pos.	gray	PP-H 2,5/4	3209895	PP-H 2,5/1-R BU	3210101	PH 2,5/5	3209727
5-pos.	gray	PP-H 2,5/5	3209900	PP-H 2,5/1-R GNYE	3210117	PH 2,5/6	3209733
6-pos.	gray	PP-H 2,5/6	3209918	PP-H 2,5/1-R BU	3210127	PH 2,5/7	3209743
7-pos.	gray	PP-H 2,5/7	3209921	PP-H 2,5/1-R GNYE	3210130	PH 2,5/8	3209756
8-pos.	gray	PP-H 2,5/8	3209934	PP-H 2,5/1-L GNYE	3210143	PH 2,5/9	3209769
9-pos.	gray	PP-H 2,5/9	3209947	PP-H 2,5/1-L BU	3210156	PH 2,5/10	3209782
10-pos.	gray	PP-H 2,5/10	3209950	PP-H 2,5/1-L GNYE	3210169	PH 2,5/11	3209795
11-pos.	gray	PP-H 2,5/11	3209963	PP-H 2,5/1-R BU	3210182	PH 2,5/12	3209808
12-pos.	gray	PP-H 2,5/12	3209976	PP-H 2,5/1-R GNYE	3210195	PH 2,5/13	3209821
13-pos.	gray	PP-H 2,5/13	3209989	PP-H 2,5/1-L BU	3210208	PH 2,5/14	3209834
14-pos.	gray	PP-H 2,5/14	3209992	PP-H 2,5/1-L GNYE	3210221	PH 2,5/15	3209847
15-pos.	gray	PP-H 2,5/15	3209981				
1-pos.	blue	PP-H 2,5/1 BU	3210004				
1-pos.	green-yellow	PP-H 2,5/1 GNYE	3210020				
1-pos., left element	gray						
1-pos., left element	blue						
1-pos., left element	green-yellow						
1-pos., center element	gray						
1-pos., center element	blue						
1-pos., center element	green-yellow						
1-pos., right element	gray						
1-pos., right element	blue						
1-pos., right element	green-yellow						

For accessories for plugs and hood, visit www.phoenixcontact.net/eshop

- The max. load current must not be exceeded by the total current of all connected conductors.
- With equipotential bond between the levels.
- The max. current is determined by the diode. Integrated: Diode 1 N 4007, reverse voltage: 1300 V, maximum continuous current: 0.5 A
- Light indicator ...LA 24 RD for 12-20 V DC, ...LA 60 RD for 30-60 V DC, ...LA 230 for 110-250 V AC/DC
- For derating curve, see www.phoenixcontact.net/eshop


Width / Length / Height [mm]	Current / voltage [A] / [V]	Solid / AWG // stranded / AWG [mm] / -	Stranded with ferrule without/with plastic sleeve [mm] / -	Directly pluggable with ferrule / solid [mm]
5.2 x number of positions / 15.8 / 39	24 / 500	0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	0.14 - 2.5	0.34 - 2.5 / 0.34 - 4
5.2 x number of positions / 15.8 / 39	24 / 500	0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	0.14 - 2.5	0.34 - 2.5 / 0.34 - 4
5.2 x number of positions / 15.8 / 39	24 / 500	0.14 - 4/26 - 12 // 0.14 - 2.5/26 - 14	0.14 - 2.5	0.34 - 2.5 / 0.34 - 4

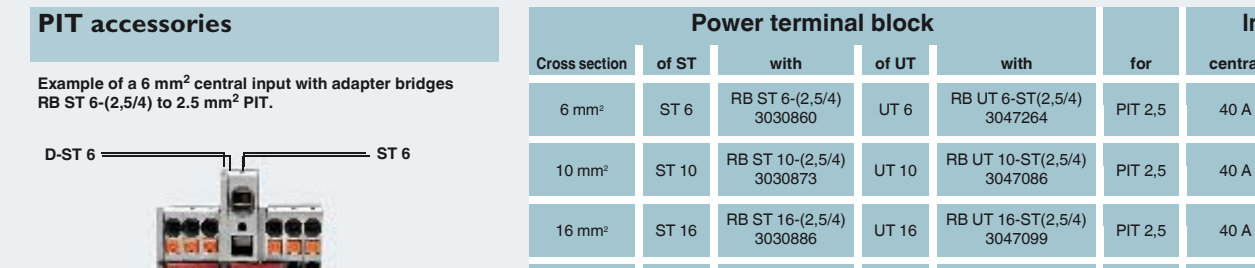


Cross section	of ST	with	of UT	with	for	central	one-sided
6 mm²	ST 6	RB ST 6-(2,5/4) 3030860	UT 6	RB UT 6-ST(2,5/4) 3047264	PIT 2,5	40 A	56 A
10 mm²	ST 10	RB ST 10-(2,5/4) 3030873	UT 10	RB UT 10-ST(2,5/4) 3047086	PIT 2,5	40 A	65 A
16 mm²	ST 16	RB ST 16-(2,5/4) 3030886	UT 16	RB UT 16-ST(2,5/4) 3047099	PIT 2,5	40 A	80 A
35 mm²	ST 35	RB ST 35-(2,5/4) 3030899	UT 35	RB UT 35-ST(2,5/4) 3047280	PIT 2,5	40 A	80 A



Mounting material	Type	Order No.
Terminal strip marker carriers, adjustable height, for CLIPFIX 35-5, can be marked with label	KLM 3-L	0814788
Snap-on end bracket	CLIPLIFX 35-5	3022276
DIN rail 35 x 7.5 mm, zinc-plated and thick layer passivated	NS 35/7.5 UNPERF 2000 MM unperforated NS 35/7.5 PERF 2000 MM perforated	0801681 0801733
DIN rail 35 x 15 mm, zinc-plated and thick layer passivated	NS 35/15 UNPERF 2000 MM unperforated NS 35/15 PERF 2000 MM perforated	1201714 1201730
Test adapter, for 4 mm Ø PS test plug and 4 mm Ø safety test plug	PAI-4	3030925
DIN rail end piece	NS 35/7.5 CAP	1206560
Screwdriver	SZF 1 - 0,6 x 3,5	1204517



Terminal block	Bridges						I _{max}	Cover	Cover segment	Separating plate	Modular test plug	Spacer plate for test plug	Marking		Marker carrier	Group marker label
	2-pos.	3-pos.	4-pos.	5-pos.	10-pos.	20-pos.							Center groove	Center and lateral groove		
PIT 2.5 ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5	—	ATP-ST 4	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-TWIN ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-TWIN	DS-ST 2.5	ATP-ST-TWIN	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-QUATTRO ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-QUATTRO	DS-ST 2.5	ATP-ST QUATTRO	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PITTB 2.5 ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-PITTB 2.5	—	ATP-STTB 4	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PITTB 2.5 ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-STTBS 2.5	—	ATP-STTB 4	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-3 ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-PIT 2.5-3L	—	—	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-3	—
PIT 2.5-MT / ...TG	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-PIT 2.5-MT	—	ATP-ST-TWIN	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-TWIN-MT / ...TG	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-PIT 2.5-TWIN-MT	—	ATP-ST QUATTRO	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	—	—
PIT 2.5-QUATTRO-MT / ...TG	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-QUATTRO-MT	—	—	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	—	—
PIT 2.5/1P ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-TWIN	—	ATP-ST 4	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-TWIN/1P ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-TWIN	—	ATP-ST-TWIN	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-QUATTRO/2P ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-QUATTRO/2P	DS-ST 2.5	ATP-ST QUATTRO	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PITTB 2.5/2P ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-PITTB 2.5/2P	—	ATP-STTB 4	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2	0800967

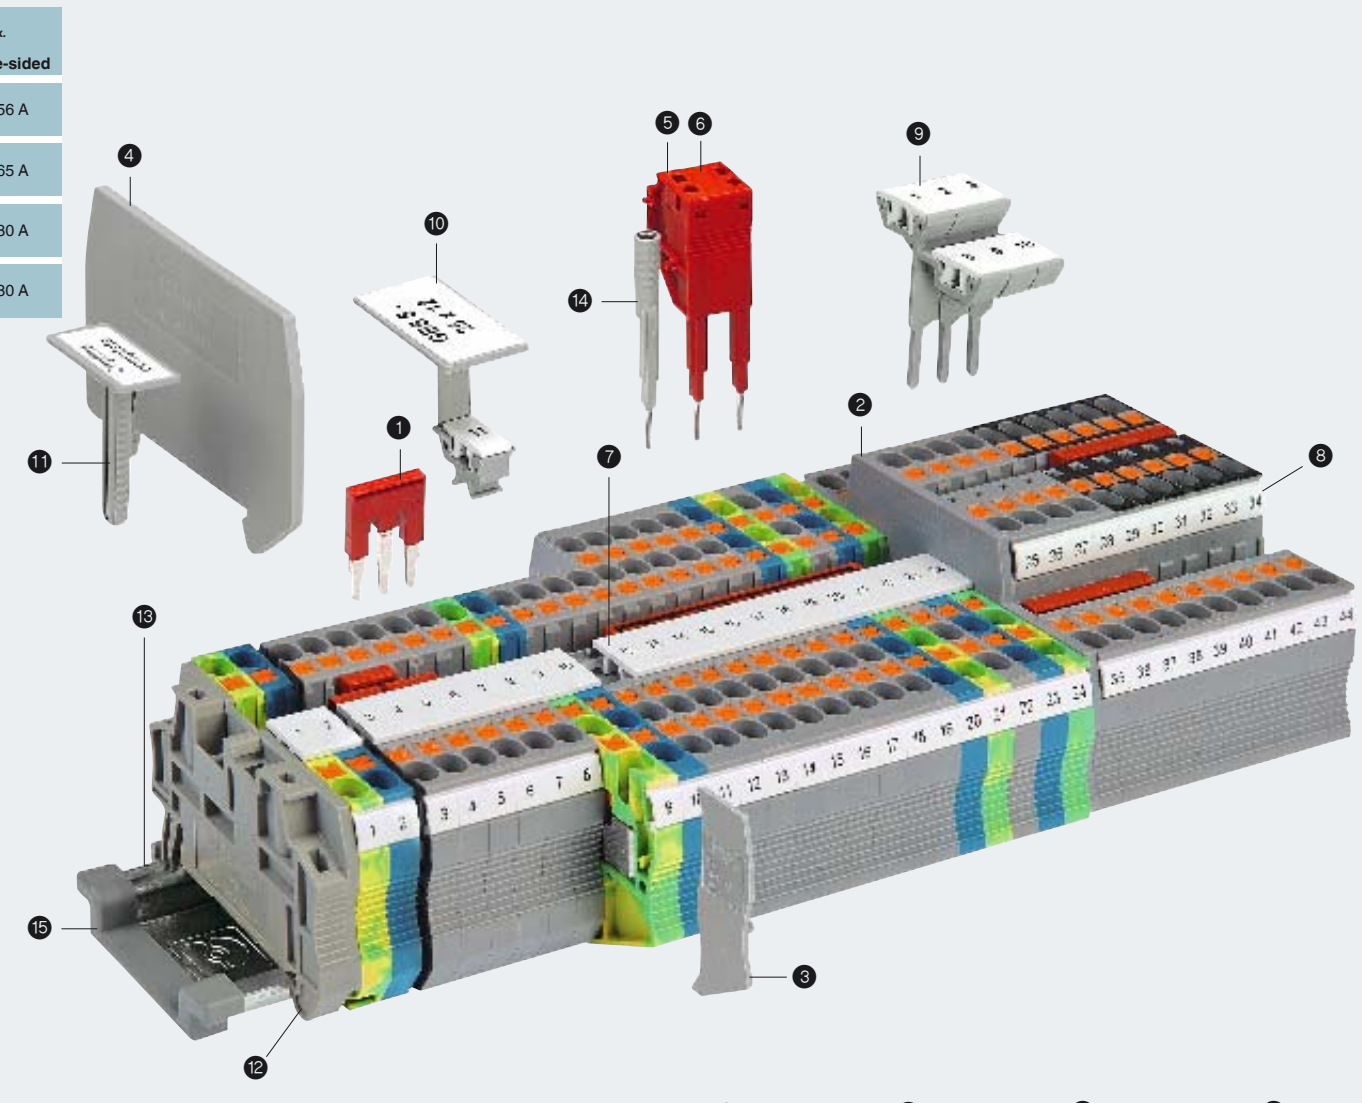

1	2	3	4	5	6	7	8	9	10							
Terminal block	2-pos.	3-pos.	4-pos.	5-pos.	10-pos.	20-pos.	I _{max}	Cover	Cover segment	Separating plate	Modular test plug	Spacer plate for test plug	Center groove	Center and lateral groove	Marker carrier	Group marker label
PIT 2.5 ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5	—	ATP-ST 4	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-TWIN ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-TWIN	DS-ST 2.5	ATP-ST-TWIN	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-ZB	GBS 5-25X12
PIT 2.5-QUATTRO ...	FBS 2-5	FBS 3-5	FBS 4-5	FBS 5-5	FBS 10-5	FBS 20-5	24 A	D-ST 2.5-QUATTRO	DS-ST 2.5	ATP-ST QUATTRO	PS-5	DP PS-5	UC-TM 5	UC-TMF 5	STP 5-2-Z	